
CABLE TERMINATION BOOTS





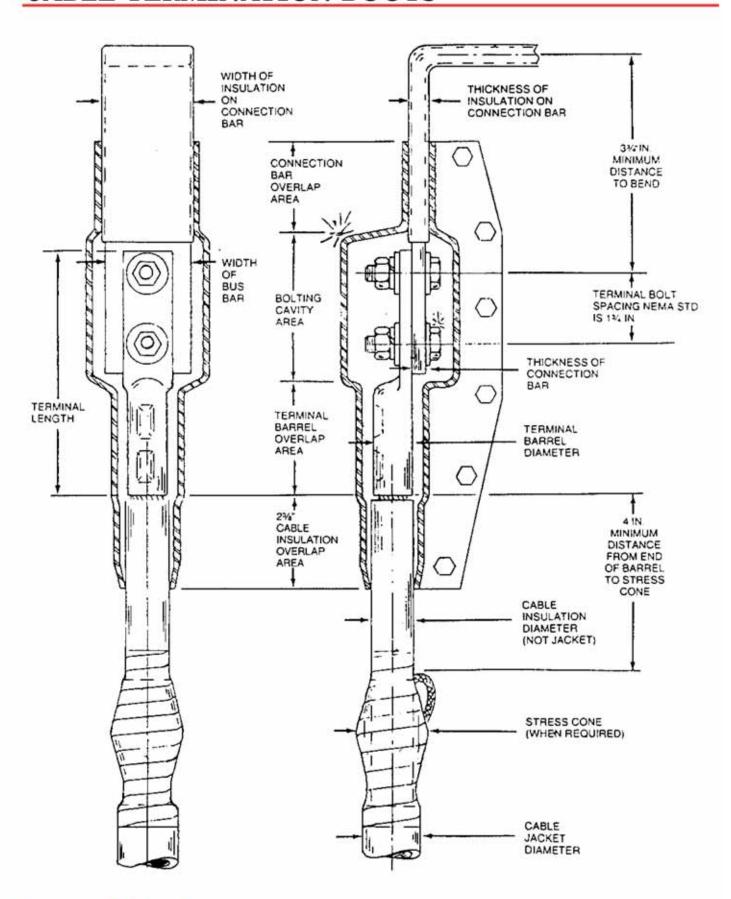

INSULBOOT® CABLE CONNECTIONS

Standard Range – Our standard range of Cable connections exceed 60 different configurations. Main Bus size and Riser size range from 1/4" by 2" to 3/4" by 8".

Free Design Services – E-mail or fax your Bus layout and we will design and supply drawings of the InsulBoot to suit your needs, usually within 2-3 days. E-mail sales@insulboot.co.uk or fax 01294 311655

Custom InsulBoot – If it is not possible to meet your specifications from our range of standards, we will design and mold a custom InsulBoot to suit your applications, usually within 7 days.

CONNECTOR TYPE	The state of the s			
CHECK ONE:	□ <u>1</u>	□ <u>2</u>	□ <u>3</u>	□ <u>4</u>
Provide Bus Size] x	If PT Tap is required, please mark position and size in sketch area provided.	
Provide Cable S	ize:	WIDTH	Bus Insulation	THICKNESS
Trovide cable 5			KV Rating	
Use this area for addit	ional notes, detai	is of sketch of your c	wii custoiii fieeus.	InsulBoot Only: Insulboot Part #
				Delivery Time
				Price
Name:	Company:			ole S
Fax:	Phone:	E-Mail:		☐ In Stock
Quantity:	Requested Delivery:			☐ Custom

