

## THRU WITH RISER CONNECTIONS

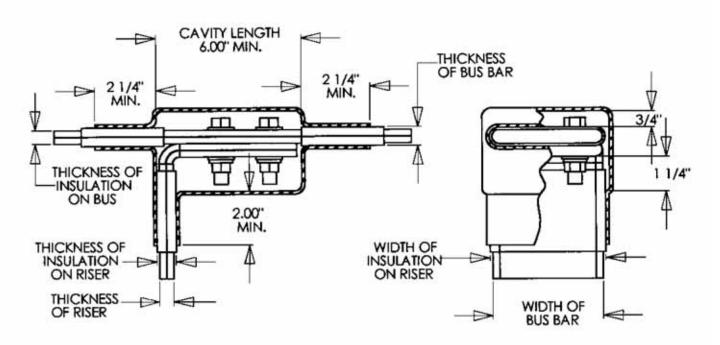

## **ILLUSTRATION OF CONFIGURATION #1**



**ILLUSTRATION OF CONFIGURATION #2** 

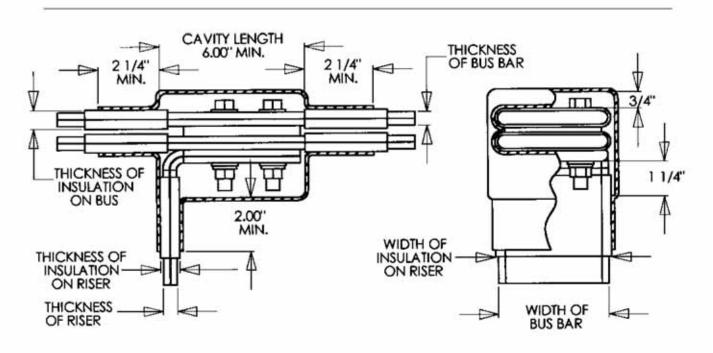



## INSULBOOT® THRU WITH RISER CONNECTIONS

Standard Range – Our standard range of Thru with Riser connections exceed 64 different configurations. Main Bus size and Riser size range from 1/4" by 2" to 3/4" by 8".

Free Design Services – E-mail or fax your Bus layout and we will design and supply drawings of the InsulBoot to suit your needs, usually within 2-3 days. E-mail <a href="mailto:sales@insulboot.co.uk">sales@insulboot.co.uk</a> or fax 01294 311655

Custom InsulBoot – If it is not possible to meet your specifications from our range of standards, we will design and mold a custom InsulBoot to suit your applications, usually within 7 days.

CONNECTOR TYPE CHECK ONE:		1 <u>1</u>		□ <u>2</u>
Provide Bus Size	e: THICKNESS	x WIDTH	If PT Tap is required and size in sketch a	d, please mark position area provided.
Provide Tap/		x WIDTH	Bus Insulation	THICKNESS
Riser Size:	THICKNESS	WIDTH	KV Rating	
				Insulboot Part #
				Delivery Time
Name:		Company:	(2)	Delivery Time
		No ulforo		Delivery Time

