STUB END BOOTS

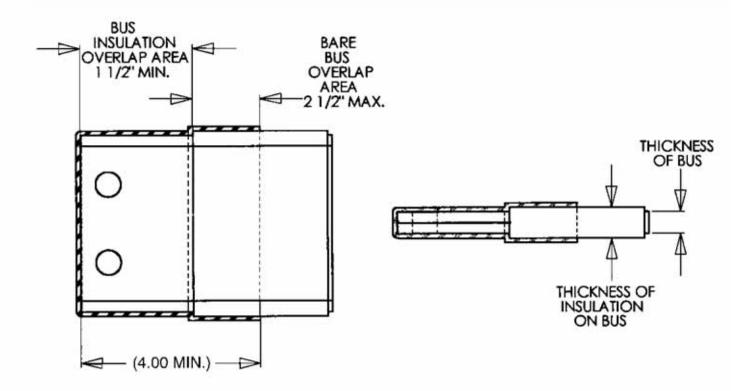


ILLUSTRATION OF CONFIGURATION #1

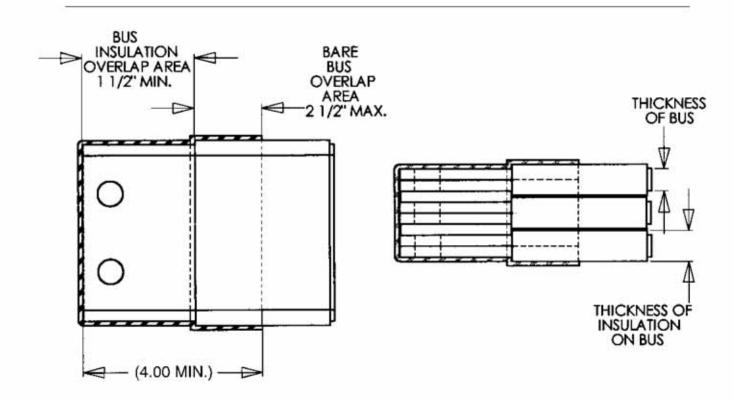


ILLUSTRATION OF CONFIGURATION #3





INSULBOOT® STUB END BOOTS

Standard Range – Our standard range of Stub End Boots connections exceed 72 different configurations. Main Bus size and Riser size range from 1/4" by 2" to 3/4" by 8".

Free Design Services – E-mail or fax your Bus layout and we will design and supply drawings of the InsulBoot to suit your needs, usually within 2-3 days. E-mail sales@insulboot.co.uk or fax 01294 311655

Custom InsulBoot – If it is not possible to meet your specifications from our range of standards, we will design and mold a custom InsulBoot to suit your applications, usually within 7 days.

	00		00		
CONNECTOR TYPE CHECK ONE:	□ <u>1</u>			<u>2</u>	□ <u>3</u>
Provide Bus Size:] x [If PT Tap is required and size in sketch a	d, please mark position area provided.
Provide Spacer	THICKNESS	widti	H	Bus Insulation	THICKNESS
Size:	THICKNESS	WIDTI	H	KV Rating	
Use this area for addition			•		InsulBoot Only: Insulboot Part #
					Delivery Time
					Price
Name:		Company:		12	Nh 20
Fax:	Phone:	E-	Mail:		☐ In Stock
Quantity:		Requested Deliv	ery:		☐ Custom

